


Palice - izvešek			
Ø [mm]	lgn [m]	Teža enote [kg/m]	Teža [kg]
S500			
8	9,05	0,40	3,57
10	487,80	0,62	300,97
12	1319,32	0,89	1171,56
14	62,35	1,21	75,44
Skupaj (S500)			1551,55
Skupaj			1551,55

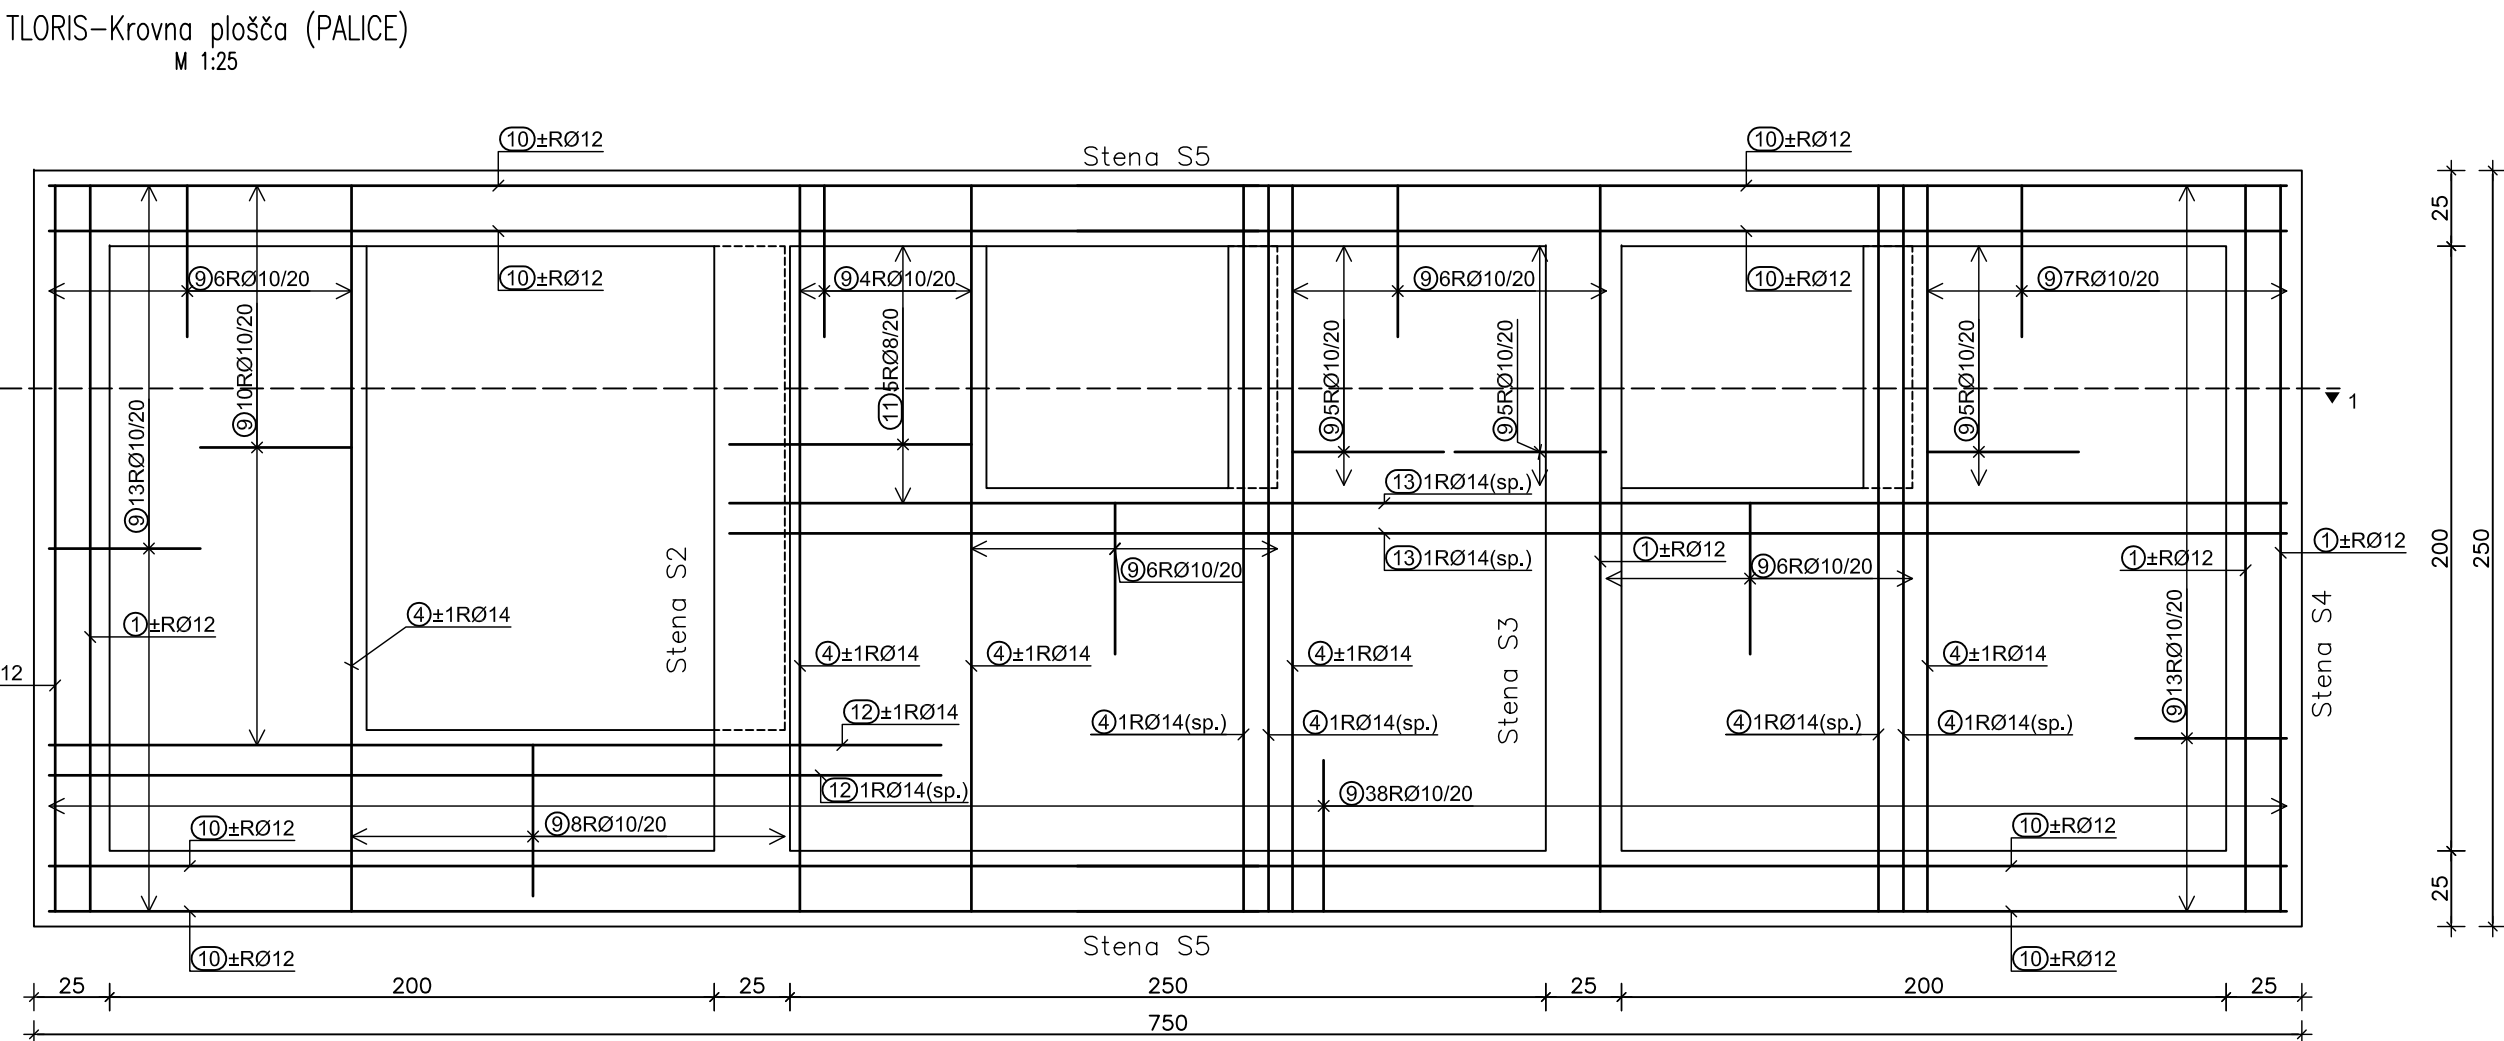

Palice - specifikacija						
ozn	oblika in mere [cm]	Ø	lg [m]	n [kos]	lgn [m]	Opomba
Palice (1 kos)						
1	240	12	2,40	34	81,60	
2	70	12	1,60	466	745,60	
3	15	12	1,55	172	266,60	
4	240	14	2,40	18	43,20	
5	515	12	5,15	8	41,20	
6	60	10	1,35	244	329,40	
7	325	12	3,25	16	52,00	
8	427	12	4,27	16	68,32	
9	50	10	1,20	132	158,40	
10	400	12	4,00	16	64,00	
11	18	8	1,81	5	9,05	
12	295	14	2,95	3	8,85	
13	515	14	5,15	2	10,30	

## Material:

Beton: C 25/30, xc2, PVII  
Podložni beton: C8/10,  
Zaščitni sloj: 4cm  
Armatura: Bst 500 S, BSt 500M

## Opombe:

-Vsi zunanji robovi betonskih konstrukcij so posneti za 2.5 cm.  
-Paziti na vidne površine betona.  
-Minimalni preklap armaturnih palic je 50Ø.  
-Minimalni preklap Q mrež je 3 okna v obe smeri.

